

LED Recessed Multi CCT Down Light



LOC-4RD-10WMCCT(27/30/35/40/50)



LOC-6RD-15WMCCT(27/30/35/40/50)



CONSTRUCTION:

Smooth baffle trim. PC and Aluminum material.

OPTICAL SYSTEM:

Frosted lens. 100° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Operating Temperature: -20°C to 45°C
(-4°F to 113°F)
Available as 120V input.

INSTALLATION & MOUNTING:

E26 socket base with torsion clips or springs.

DIMMING:

Triac Dimming.

FEATURES

- Default CCT: 5,000K
 - 2,700K / 3,000K / 3,500K / 4,000K / 5,000K
- E26 screw base adapter connects directly to a standard socket
- Instant on
- Wet location rated
- No flicker
- IC Airtight
- 50,000 hours

SUITABLE APPLICATIONS

- Kitchens
- Bedrooms
- Bathrooms
- Corridors
- Hallways
- Museums

Energy Star ID:

- LOC-4RD-10WMCCT(27/30/35/40/50) – 3722566
- LOC-6RD-15WMCCT(27/30/35/40/50) – 3722567



LOC-4RD-10WMCCT(27/30/35/40/50)


WATTAGE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	REPLACES
10W	2700K / 3000K 3500K / 4000K /5000K	820LM	82lm/W	120V	96	0.92	40W

LOC-6RD-15WMCCT(27/30/35/40/50)


WATTAGE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	REPLACES
15W	2700K / 3000K 3500K / 4000K /5000K	1,230LM	82lm/W	120V	96	0.94	40W

MEASUREMENTS

LOC-4RD-10WMCCT(27/30/35/40/50)

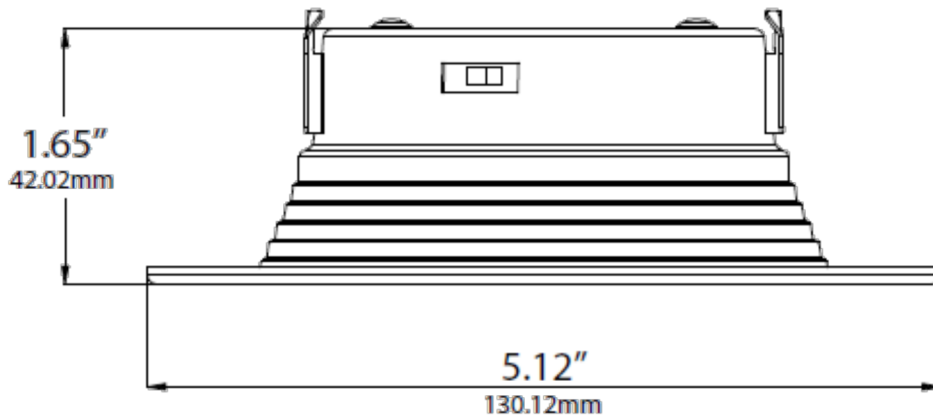

LOC-6RD-15WMCCT(27/30/35/40/50)

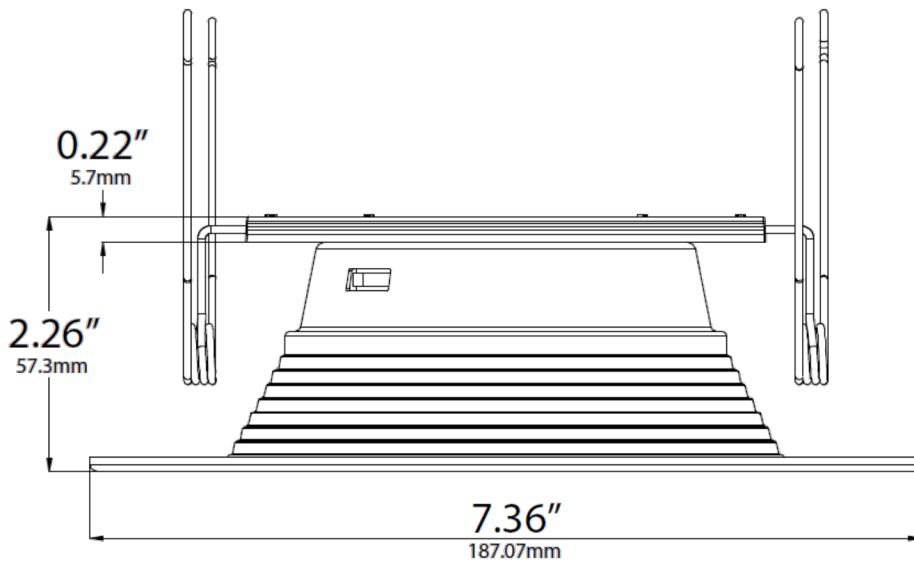

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-4RD-10WMCCT(27/30/35/40/50)	1	lbs	23.23" x 16.54" x 11.42"	20.94lbs	60	00810050947381
LOC-6RD-15WMCCT(27/30/35/40/50)	1	lbs	17.52" x 16.34" x 23.43"	19.4lbs	30	00810050947398